

SRZ- 270 and SRZ 220


Outdoor Zoom Camera with IR



✦ You to View and Control your Camera Using One Coaxial Cable

■ Features

1. 1/4" Hi Resolution CCD, NTSC: 410,000 pixels / PAL: 470,000 pixels
2. Built-in 22 Times and 27 Times Optical Lens, Digital Zoom up to 352 and 270 Times
3. With Auto Focus / Iris Function
4. Built-in OSD Menu Function Set-up which is able to operate easily by Control Keyboard
5. Ability to use one coaxial cable as transmission interface for image and data signal, which will simplify the wiring installation work.
6. On single coaxial cable Image and Data Transmission Distance up to 600 Meters.
7. With Multi Control Protocol being able to be mastered by keyboard, no need to make any setup on camera, which will facilitate the setup procedure.
8. Max. 256 ID Address set up by keyboard, no need on camera, which will facilitate the setup procedure.
9. Our control receiver offers 4 video input / 4 video output, and 1 RS485 Input / Output, which will be able to connect Multi Receivers and assure accurate signal
10. Each Image can be set up as 75Ohms and Hi by Coaxial Control Receiver
11. With Highly Strong Aluminum Alloy Enclosure, Protection Level at IP67
12. Option of IR Function Enables Sharp Image under Insufficient Light at Night

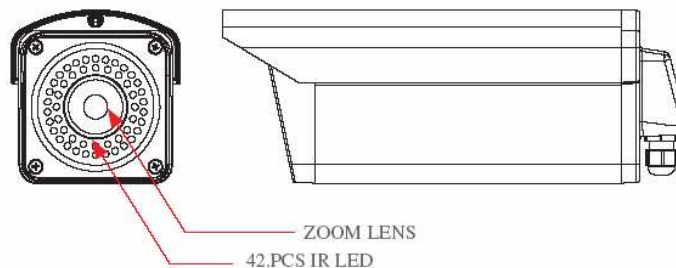

Model Specifications

Image Device	1/4" Color CCD	
Pixel	NTSC: 380,000. pixels / PAL: 440,000. pixels	
Sync-Sync	Internal / External	
LENS	22 times Optical Lens	27 times Optical Lens
	f=3.9mm to 85.8mm	f=3.25mm to 88mm
Digital Zoom	352 times Digital Zoom	270 times Digital Zoom
Image Angle		
Focus mode	Auto / Manual	Auto / Manual
H-Resolution	More than 480 TVL	More than 480 TVL
S/N noise rate	More than 48 Db	More than 50 Db
illumination	0.7 Lux	1.0 Lux Color mode/ 0.1Lux in B/W mode
WIDE DYNAMIC CONTROL	N/A	Option
WDR setup	N/A	Option, Activate, Not Activate, Auto
Electronic Shutter	Auto / Manual 1/60(50)~1/30,000.	
Preset points	8 preset points	
AGC Control	Auto/Manual (1Db~26Db Control)	
Transmission Distance	Single Coaxiable image + control 600 meter	
White Balance Control	5 Control Modes	
OSD display	Display all function Symbols on LCD screen	
Protection Level	IP 67	

