

SKB-2000 – 2A / 3A

Keyboard Controller System 2 and 3 Axis Full- Functionality, Variable Speed, PTZ control


3 AXIS
2 AXIS


- ◆ Securtex Keyboard Controller offers 2 solutions: with 2-AXIS Joystick, other 3-AXIS Joystick,
- ◆ The lens of speed dome, Pan / Tilt and Zoom in / Out functions can be controlled by the Joystick at the same time.
- ◆ Securtex keyboard offers functions to set as “Master” and “Slave”
- ◆ Moreover, this keyboard provides superior expansion ability for your system upgrade to be able to connect totally 16 pieces of 16 channel Multiplexer so as to control up to 256 cameras.

Highlights


1. offers 5 different protocols
2. can set up as “Master” and “Slave” keyboard; max. up to 4 keyboard to enable the function of the multi-control system.
3. with 2-axis and 3-axis joystick
4. built-in to be able to connect up to 16 pieces of multiplexer and DVR
5. be able to control “ZOOM IN/OUT” , “FOCUS NEAR / FAR” , “IRIS OPEN/CLOSE” of camera lens
6. be able to setup the Menu of Speed Dome Camera and Multiplexer
7. be able to setup and call the Preset Points, Preset Tour, Auto Pan, Patrol Learn functions etc.
8. built-in with LCD screen
9. be able to connect up to 255 pieces of Speed Dome camera
10. max. control distance up to 1200 meters

Rear view:

- A. Power input DC12V
- B. RS485 IN/OUT port

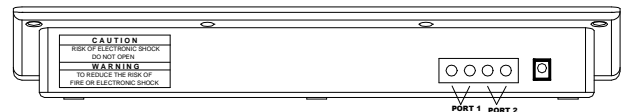


OUTLOOK:

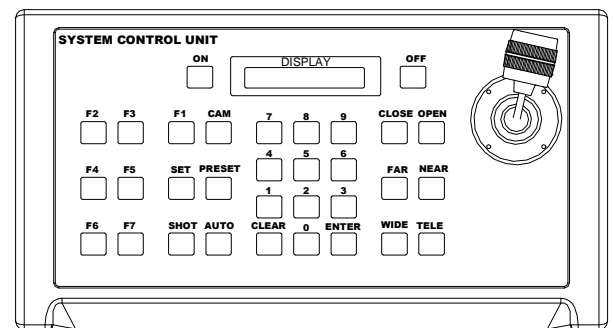

Model Specifications

- Input voltage : DC12V, 500mA
- Communication port: RS485
- Communication protocol: include 5 protocol
- LCD display: 16. character
- Keyboard joystick: 2-Axis, 3-Axis
- Temperature : -5°C ~ +50°C
- Humidity : 10% ~ 90%
- Dimensions: 350(W)x200(D)x62 (H)mm

SYSTEM CONNECT 1 :

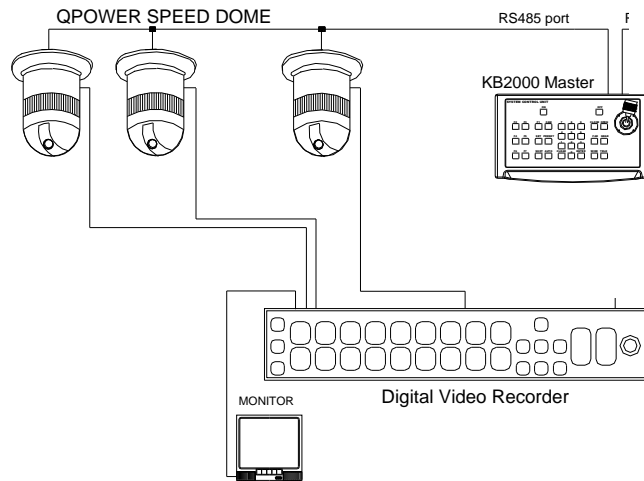

SYSTEM CONNECT 2 :

